

S DISPENSERS SELF SERVICE K44



EN. Complete range of fuel dispensers for non commercial use. Sturdy structure fitted with front door for easy maintenance operations. High capacity vane pump. Inbuilt bypass.

Automatic nozzle with swivel connection. Inbuilt water absorption filter (or on request according to model) to ensure that dispensed product is free of impurities.

Rotating-disk displacement flow meter with mechanical readout system.

ES. Gama completa de surtidores de carburante para uso privado. Estructura robusta con tapa anterior para facilitar las operaciones de mantenimiento. Bomba de paletas de elevado caudal. By-pass incorporado.

Pistola automática con racor giratorio. Filtro de absorción de agua incorporado (o a petición, según los modelos) capaz de garantizar un producto suministrado libre de impurezas.

Dotados de cuentalitros volumétrico de disco oscilante con indicación mecánica.

PT. Gama completa de distribuidores de carburantes para uso particular. Estrutura robusta equipada com portinha dianteira para facilitar a manutenção. Bomba de palhetas de alta vazão. Bypass incorporado.

Pistola automática com união giratória. Filtro para absorção da água incorporado (ou a pedido segundo os modelos) com capacidade de assegurar fornecimento de produto isento de impurezas.

Equipados com contador de litros volumétrico de disco oscilante com indicação mecânica.


PERFORMANCE

- Flow rate up to 90 l/min
- Accuracy: +/- 1 %
- Continuous AC operation.
- Noise level below 75 dB
- IP55 protection

- Caudal hasta 90 l/min
- Precisión: +/- 1 %
- Funcionamiento continuo CA
- Nivel sonoro inferior a 75 dB
- Protección IP55

- Caudal até 90 l/min
- Precisão: +/- 1 %
- Funcionamento contínuo AC
- Ruído inferior a 75 dB
- Protecção IP55

DIMENSIONS

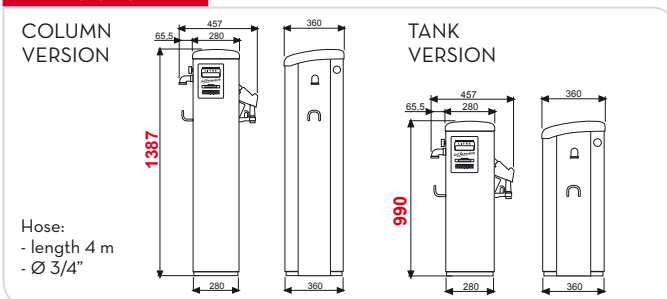

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
Column versions					
F0073701B	67	148	1478x488x400	58,2x19,2x16,5	1
F0074001B	75	165	1478x488x400	58,2x19,2x16,5	1
F0074002A	75	165	1478x488x400	58,2x19,2x16,5	1
Tank versions					
F00737B0B	57	126	1080x488x400	42,5x19,2x16,5	1
F00740B2B	57	126	1080x488x400	42,5x19,2x16,5	1
F00740B0B	65	143	1080x488x400	42,5x19,2x16,5	1



DISPENSERS

Flow-rate

up to
90 l/min
(up to 24 gpm)

Accuracy

+/-
1 %

PIUSI
®

DISPENSERS

PUMPS

METERS

NOZZLE
METERS

NOZZLE

SPECIAL
EQUIPMENTSFLUID
MONITORING

ACCESSORIES

FILTERING



Column version



Tank version

ACCESSORIES

Mechanical meter
integratedFilter integrated
(column version)

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids	Flow-rate		Voltage			Pump	Meter	Nozzle	Filter		Inlet	PC
		type	l/min	gpm	AC V/Hz DC Volt	Power Watt	Amp. max.	mod.	mod.	type	H ₂ O filter	Filtering capacity	BSP	connec- tion
Column versions														
F0073701B	Self service 70 K44 F	D B	70	18	230/50	900	4,2	Panth 72	K44	Aut.	YES	30 μ	1"1/2	NO
F0074001B	Self service 100 K44 F	D B	90	24	230/50	1150	5,7	E 120	K44	Aut.	YES	30 μ	1"1/2	NO
F0074002A	Self service 100 K44 Pulsar	D B	90	24	230/50	1150	5,7	E 120	K44P	Aut.	YES	30 μ	1"1/2	NO
Tank versions														
F00737B0B	Self serv. 70 K44 Tank	D B	70	18	230/50	900	4,2	Panth 72	K44	Aut.	NO	-	1"1/2	NO
F00740B2B	Self serv. 100 K44 Tank Pulsar	D B	90	24	230/50	900	4,2	Panth 72	K44P	Aut.	NO	-	1"1/2	NO
F00740B0B	Self service 100 K44 Tank	D B	90	24	230/50	1150	5,7	E 120	K44	Aut.	NO	-	1"1/2	NO

Upon request it is available with different tension and 60 Hz frequency