



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL
EQUIPMENTS

K500

FEATURES

- PRESET FUNCTION
- HIGH ACCURACY
- STANDARD BATTERY AA
- ERGONOMIC GRAB
- ROTATING SPOUT
- SHOCK-ABSORBING PROTECTION
- IP55 PROTECTION
- ADJUSTABLE UNIT OF MEASUREMENT

The PIUSI K500 is the most widespread preset nozzle for oil. It has an ergonomic handle, an oval gear meter and a preset function to always choose the right quantity before dispensing.

PERFORMANCE

UP TO

30 L/MIN

FLOW RATE

70 BAR

OPERATING PRESSURE

± 0,5%

ACCURACY

UP TO

2000 CST

VISCOSITY

**K500****A**

ROTATING SPOUT
R12519000
PAG. 96

**B**

FLEXIBLE SPOUT
FOO676070
PAG. 96

**C**

RIGID SPOUT
FOO676080
PAG. 96



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX		
FOO68700D	1,8	4	28OX16OX14O		1	128	160
FOO68720A	1,8	4	28OX16OX14O		1	128	160
FOO68721A	1,8	4	28OX16OX14O		1	128	160



FILTRATION



FLUID
MONITORING



TANK
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

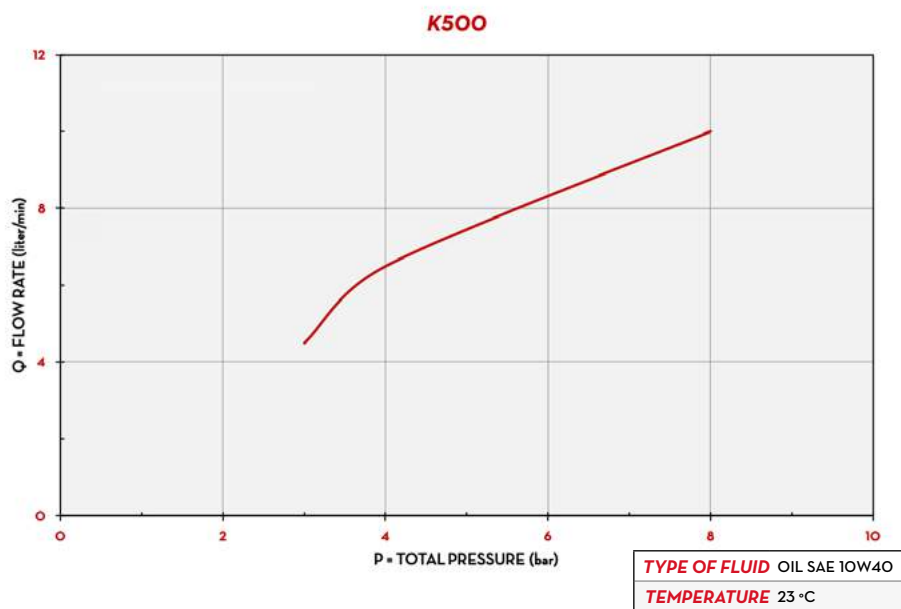

DIMENSIONS

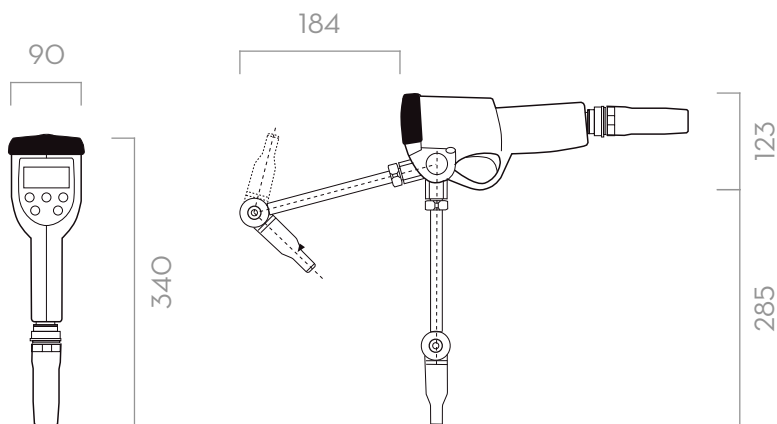

Dimensions expressed in millimeters

IN THE BOX

- K500 NOZZLE
- INSTRUCTION MANUAL

DETAILS



MATERIALS

- NOZZLE BODY: ALLUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS
- METER BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT TYPE	AUTOMATIC NO DRIP VALUE	FLOW RATE		WORKING PRESSURE		BATTERIES SIZE 1,5 V AA NO.	INLET
					L/MIN	GPM	BAR	PSI		
FO068700D	K500 PRESET NOZZLE .75" BSP W/ROT SPOUT			YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" BSP
FO068720A	K500 PRESET NOZZLE .75" BSP W/RIGID SPOU			YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" BSP
FO068721A	K500 PRESET NOZZLE .75" BSP W/FLEX SPOUT			YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" BSP

K500

METERED NOZZLES

93